
**no co Fault Code**\* – No cooling detected by the controls - S/N 832171 and higher

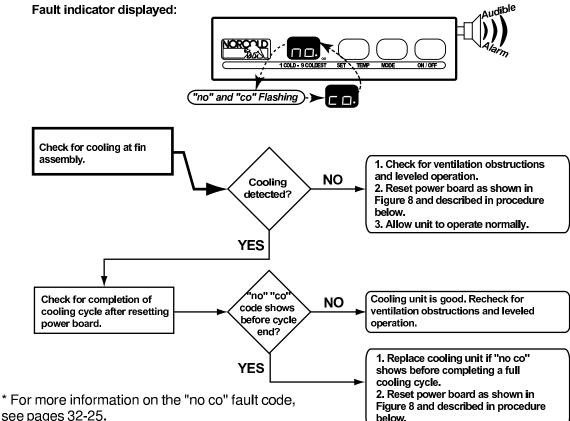

see pages 32-25.

## **Power Board Resetting Procedure**

- 1. Turn OFF the refrigerator.
- 2. Disconnect the following from power board: a. 12 Vdc positive and negative wires.
  - b. AC power cord.
  - c. Solenoid gas valve wires.
  - d. Spark/sense electrode assembly wires.
- 3. Remove the power board cover.
- 4. Reconnect 12 Vdc positive and negative wire.
- 5. Turn ON the refrigerator.
- 6. Locate Pin 15 on 16 pin connector (P1). Pin 15 is the empty socket to the right of the white/violet wire on the top row. See Figure 9.
- 7. Using an insulated jumper wire, short Pin 15 to the power board ground lug for 10 - 15 seconds. A click sound will indicate when the controls are reset. See Figure 8.

## NOTE

A jumper wire to short Pin 15 to ground can be made from a six inch long insulated 22 AWG wire with a 1/2 inch of insulation stripped from each end.

- 8. Turn OFF the refrigerator.
- Turn ON refrigerator. If "no co" code displays, 9. repeat steps 7 - 9.

10. Turn OFF the refrigerator.

- 11. Disconnect the 12 Vdc power positive and negative wires from the power board.
- 12. Install the power board cover.
- 13. Reconnect the following to the power board:
  - a. Spark/sense electrode assembly wire.
  - b. Solenoid gas valve wires.
  - c. AC power cord.
  - d. 12 Vdc positive and negative wires from the power board.
- 14. Place refrigerator in service.

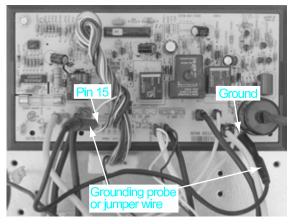


Figure 8. Resetting the power board




## This manual has been provided courtesy of My RV Works, Inc.

www.myrvworks.com



You can find more RV service manuals here:

www.myrvworks.com/manuals

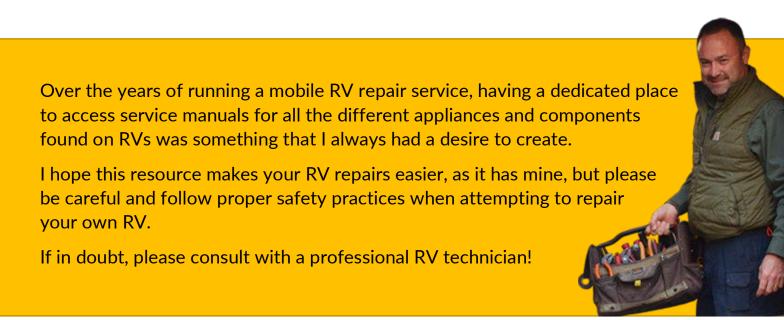

DARREN KOEPP - OWNER, MY RV WORKS, INC.

All service manuals provided on www.myrvworks.com are believed to be released for distribution and/or in the public domain.