



The nature of climate.™



**Dometic Peerless
Low Profile Air Conditioner**



The Penguin II has a sleek, futuristic look with incredible performance. Choose an air conditioner or heat pump for comfort and durability.

Full automation means freedom from worry.

The heat pump is thermostatically controlled (CCC II Thermostat) and automatically activates the P gas furnace at 40 degrees for continuous relaxation.



Dometic Penguin II — Low Profile Air Conditioner

Dometic does cool with style. Our air conditioners are versatile performers with a low profile. Fully automated and worry free.

Air Distribution Box

- Five multi-directional air slots
- Ratcheting side vents
- Washable Hepa-style filters



Single Zone LCD Thermostat

- Simple, three-button operation
- Easy control for cool/ furnace, heat pump or heat strips
- Low profile
- Manual or automatic control
- Large display screen



Comfort Control Center II

- Fully digital operation
- Large, low profile Single bluelight display
- Industry first, real time-of-day, area independent programming
- Easily controls rooftop, heat pump, furnace, heat strip, dual heat floor system or automatic generator Start



Return Air Grill

- Washable filter
- Quiet cool air discharge
- Low profile




Copper tubing's lower heat factor provides superior heating and cooling.



Rubber damper reduces vibration and noise while adding support to copper tubing.



Ribbed fan housing adds strength for reduced vibration.

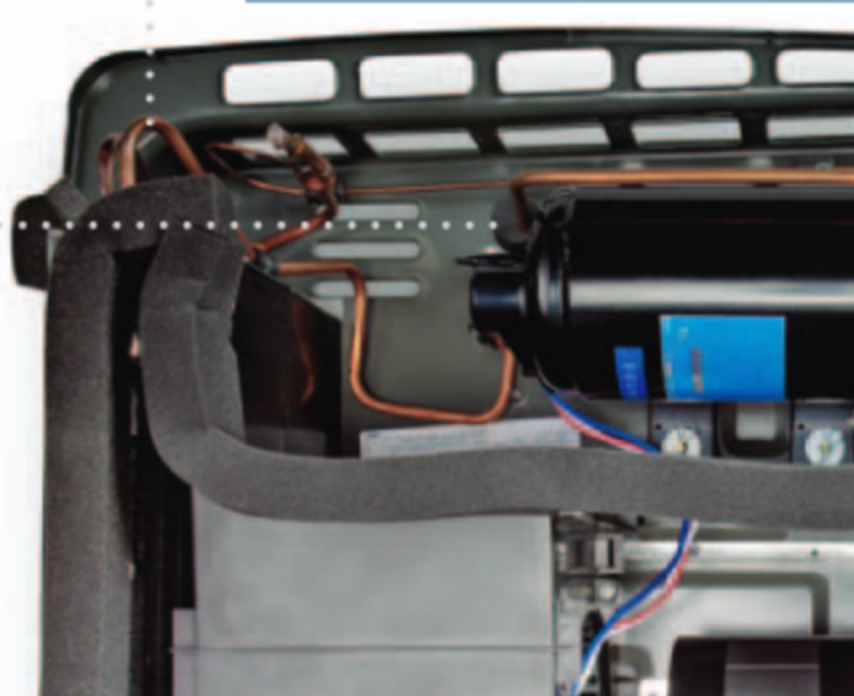

The Penguin

- Beautiful on the outside, genius on the inside
- What you don't see is the industry leader in air conditioners.



Dometic Penguin II — Low Profile Air Conditioner

Features	60312C	60315C	64193 64191
Nominal capacity, BTU/hr	11,000	13,500	13,500
Installation type	Non-ducted	Non-ducted	Non-ducted or Ducted
Electrical rating			
Compressor-rated load amps	10.5	12.7	12.7
Fan motor-rated load amps	2.6	2.6	2.6
Compressor-locked rotor amps	53	63	63
Fan motor-locked rotor amps	8.5	8.5	8.5
SCFM, high-speed max./min.	320/250	320/250	320/250
Heater amps/watts @ 120V AC			13.7/1644
Refrigerant 410A (oz.)	19.0	18.0	18.0
Minimum wire size	12 AWG copper up to 24 feet.		
AC circuit protection	(User Supplied)		
DC circuit protection	(User Supplied) Installation must be in accordance with applicable codes.		

This manual has been provided courtesy of
My RV Works, Inc.

www.myrvworks.com



You can find more RV service manuals here:

www.myrvworks.com/manuals

Over the years of running a mobile RV repair service, having a dedicated place to access service manuals for all the different appliances and components found on RVs was something that I always had a desire to create.

I hope this resource makes your RV repairs easier, as it has mine, but please be careful and follow proper safety practices when attempting to repair your own RV.

If in doubt, please consult with a professional RV technician!



DARREN KOEPP - OWNER, MY RV WORKS, INC.

All service manuals provided on www.myrvworks.com are believed to be released for distribution and/or in the public domain.